
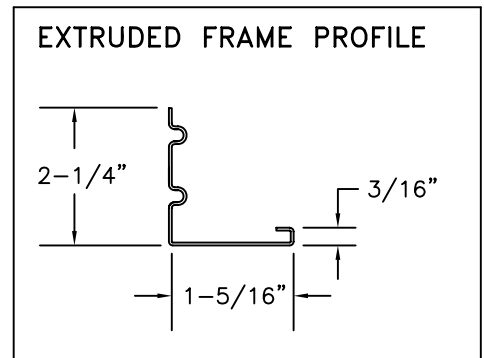


MODEL VM SHOWN

**CONSTRUCTION NOTES:**

- **Frame:** Heavy rollformed aluminum. Frame is assembled using corner clips to assure hairline mitered corners.
- **Blades:** Tear-drop shape rollformed aluminum. Each blade is individually adjustable (without use of special tools). Blades are spaced  $3/4$ " on centers and are mounted on pressure fitted polypropylene retainers to assure a quiet and rigid assembly.
- **Vanes:** Deflection vanes are easily set without use of special tools.
- **Damper:** Multi- Shutter Damper is easily adjusted.
- **Depth:** Narrow depth of Damper design allows Grill/Damper combination to be used in stackheads of minimum depth.
- **Gasket:** A sponge rubber gasket prevents streaking.
- **Optional:** Model PF Plaster Frames are available.
- **Finish:** White or satin aluminum enamel paint applied prior to fabrication to prevent paint peel or lift and to maximize corrosion resistance.
- **Sizes:** 4" x 6" min., 20" x 14" max.

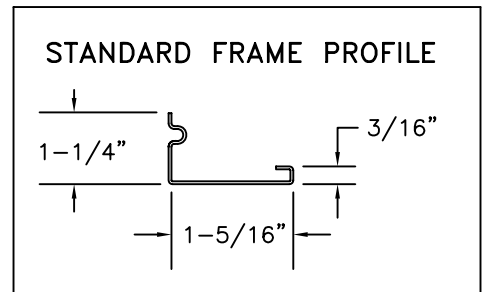

NOTE: ALL DRAWINGS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

TITLE: MODELS VM OR HM  
ALUMINUM SINGLE DEFLECTION SUPPLY  
WITH MULTI-SHUTTER DAMPER



DRN BY: CV	DATE: 4/11/00	SCALE: NTS	DRAWING NO. SG101-B
CKD BY: DJL	DATE: 4/11/00	REV: AO	