

### General

Pre Pleat with activated carbon works almost like an odor "sponge." This versatile filter is an excellent choice in commercial/industrial settings for remediation of minor odor problems.

This filter combines the low resistance, high dust holding capacity of a pleated filter with the odor removing abilities of activated carbon. The base filtration medium is polyester synthetic fiber. It has a generous 100% add-on of activated carbon by weight. (Weight of activated carbon equals the weight of the media to which it is adhered.) As odor producing gases come in contact with the activated carbon in the filter, they are adsorbed...trapped and held in millions of microscopic carbon pores.

### Construction

The filter medium is comprised of a polyester synthetic fiber felt with an add-on of powdered, activated carbon. This medium is adhered with hot-melt adhesive to an expanded metal backing, then folded into an accordion pleat arrangement. This media pack is encased and sealed within a moisture resistant kraft board frame.

### Activity Level


Ability of activated carbon to catch and hold a gas or vapor is referred to as its level of "activity." The higher the activity level, the higher its adsorption level. The activated carbon used in the in this filter is a coconut shell material with an activity level of 60% or more when subjected to the most common test, using carbon tetrachloride.

However, the effectiveness of activated carbon will actually vary considerably depending upon the odor or vapor to be removed. Typically, the adsorptive capacity of activated carbon is higher for those adsorbates with higher molecular weights and boiling points. A chart on the back side of this sheet lists activated carbon's typical effectiveness on various substances with a ranking from 1 (low effectiveness) to 4 (high, typically adsorbs to level of 20% or more of the carbon's weight).

The effective life of activated carbon depends upon the type and quantity of substances to be adsorbed and their dwell time in contact with the activated carbon.

### Key Features

- With activated carbon
- Fast, easy remediation for minor odor problems
- Low resistance
- High dust holding capacity

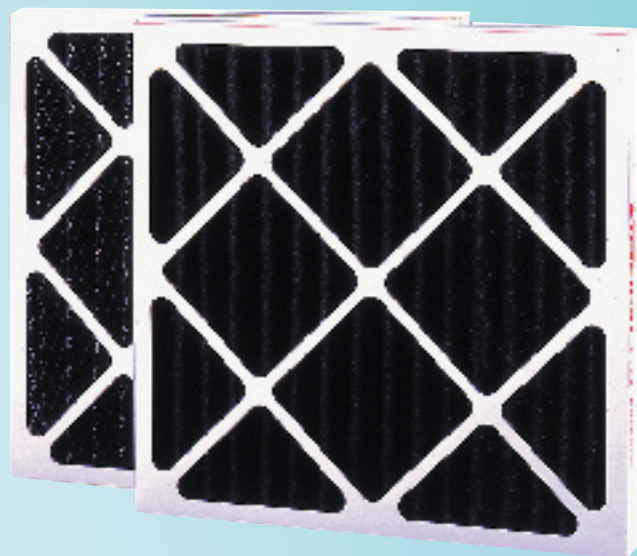

## Effective Levels of Activated Carbon Adsorption

Substance	Molecular Weight	Approx Activity	Substance	Molecular Weight	Approx Activity	Substance	Molecular Weight	Approx Activity
Methane Series			Cresol	108.13	4	Chloroform	119.39	4
Methane	167.04	1	Menthol	156.26	4	Carbon Tet.	153.84	4
Ethane	30.07	1	Formaldehyde	30.03	1	Iodoform	393.78	4
Propane	44.09	2	Acetaldehyde	44.05	2	Phosgene	98.92	4
Butane	58.12	2	Propionaldehyde	58.09	3	Pyridine	79.10	4
Pentane	72.15	3	Acrylaldehyde	56.06	3	Indole	117.14	4
Hexane	86.17	3	Butyraldehyde	72.10	4	Skatole	131.17	4
Heptane	86.17	3	Valeraldehyde	86.13	4	Nicotine	162.23	4
Heptane	100.20	4	Crotonaldehyde	70.09	4	Nitrobenzene	123.11	4
Octane	114.23	4	Formic Acid	46.03	2	Urea	60.06	3
Nonane	128.25	4	Lactic Acid	90.08	3	Uric Acid	168.11	4
Decane	142.28	4	Acetic Acid	60.05	4	Putrescine	88.15	4
			Propionic Acid	74.08	4	Chlorine	70.91	3
Acetylene Series			Butyric Acid	88.10	4	Bromine	159.83	4
Acetylene	26.04	1	Valeric Acid	102.13	4	Iodine	253.84	4
Propyne	40.06	2	Acrylic Acid	76.06	4	Hydrogen Fluoride	20.01	1
Butyne	54.09	2	Caprylic Acid	144.21	4	Hydrogen Chloride	36.47	2
Pentyne	68.11	3	Pamitic Acid	256.42	4	Hydrogen Bromide	80.92	2
Hexyne	82.14	3	Methyl Acetate	74.08	3	Hydrogen Iodide	127.93	2
			Ethyl Acetate	88.10	3	Nitrogen Dioxide	46.01	2
Ethylene Series			Propyl Acetate	102.13	4	Nitric Acid	63.02	2
Ethylene	28.05	1	Butyl Acetate	116.16	4	Sulfur Dioxide	64.08	2
Propylene	42.08	2	Amyl Acetate	130.18	4	Sulfur Trioxide	80.06	3
Butylene	56.10	2	Acetone	58.08	3	Sulfuric Acid	98.08	4
Pentylene	70.13	3	M.E.K.	72.10	4			
Hexylene	84.16	3	Diethyl Ketone	86.13	4	Adhesives		4
Heptylene	98.18	4	Dipropyl Ketone	114.18	4	Ammonia		2
Octalene	112.21	4	Methyl Ether	46.07	3	Asphalt fumes		4
			Ethyl Ether	74.12	3	Auto Exhaust		3
Benzene Series			Propyl Ether	102.17	3	Bathroom smells		4
Benzene	78.11	4	Butyl Ether	130.23	4	Bleaching Solutions		3
Toluene	92.13	4	Amyl Ether	158.28	4	Cleaning Compounds		4
Xylene	106.16	4	Methyl Acrylate	86.09	4	Cooking Odors		4
			Ethyl Acrylate	100.11	4	Hospital Odors		4
Other substances			Methyl Mercaptan	48.10	4	Household Smells		4
Isoprene	68.11	3	Ethyl Mercaptan	63.13	4	Jet Fuel Fumes		4
			Propyl Mercaptan	76.15	4	Kitchen Odors		4
Turpentine	136.23	4	Eucalyptol	154.25	4	Mildew		3
Naphthalene	128.16	4	Camphor	155.23	4	Mold		3
Phenol	94.11	4	Methyl Chloride	50.49	3	Ozone		4
Methyl Alcohol	32.04	3	Ethyl Chloride	64.52	4	Paint & Redecorating Odors		4
Ethyl Alcohol	46.07	4	Propyl Chloride	78.54	4	Smog		4
Propyl Alcohol	60.09	4	Butyl Chloride	92.57	4	Stale Odors		4
Butyl Alcohol	74.12	4	Methylene Chloride	84.94	4			
Amyl Alcohol	88.15	4						

- 4: High adsorptive capacity with the substance listed.  
Activity of activated carbon typically will run 20% or more of the activated carbon's weight.
- 3: Satisfactory adsorptive capacity with substance listed.  
Activity of activated carbon typically will run 10% or more of the activated carbon's weight.
- 2: Borderline adsorptive capacity with substance listed.  
Activity of activated carbon typically will run 5% or more of the activated carbon's weight.
- 1: Low adsorptive capacity with substance listed.  
Activity of activated carbon will typically run less than 5% of the activated carbon's weight.